




CODE MODEL

WDD - 1.3 / 7



Standard Condition	Room Temp.	Evaporation Temp.
SC	(°C)	T _E (°C)
SC1	10	0
SC2	0	-8
SC3	-18	-25
SC4	-25	-31
SC5	-34	-40

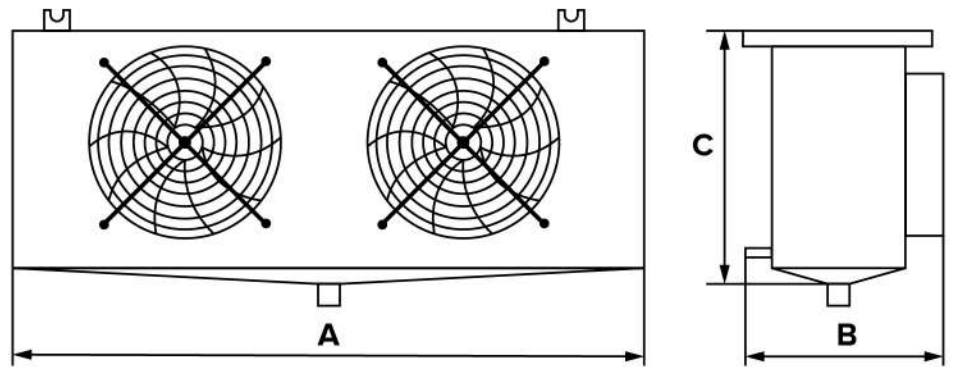

WDD EVAPORATOR SERIES FREEZER (FIN SPACING: 6mm)

Model	R404 Cooling Capacity SC3	Cooling Area	Fan Motor				Heater Power	Liquid Inlet Tube	Suction Tube	Dimension		
			Qty	Dia.	Power	Air Vol.				A	B	C
			n	mm	W	m ³ /h				mm	mm	mm
WDD-1.3/7	1300	7	1	Φ 350	150	3110	3x0.5	Φ 12	Φ 16	780	360	465
WDD-2.2/12	2200	12	2	Φ 350	150	3110	3x0.9	Φ 12	Φ 16	1145	360	465
WDD-2.8/15	2800	15	2	Φ 350	150	3110	3x0.9	Φ 12	Φ 16	1145	360	465
WDD-3.7/22	3700	22	2	Φ 350	150	3110	3x1.2	Φ 12	Φ 16	1310	500	480
WDD-5.6/30	5600	30	2	Φ 400	280	5100	3x1.5	Φ 16	Φ 25	1530	500	565
WDD-7.5/40	7500	40	2	Φ 400	280	5100	3x1.5	Φ 16	Φ 25	1530	500	565
WDD-11.2/60	11200	60	2	Φ 500	640	8500	6x1.3	Φ 19	Φ 38	1830	670	670
WDD-14.9/80	14900	80	2	Φ 500	640	8500	6x1.5	Φ 19	Φ 38	1830	670	670
WDD-18.7/100	18700	100	3	Φ 500	640	8500	6x1.9	Φ 19	Φ 38	2310	670	670
WDD-22.4/120	22400	120	3	Φ 500	640	8500	6x2.4	Φ 19	Φ 38	2730	670	670
WDD-26.2/140	26200	140	4	Φ 500	640	8500	6x2.6	Φ 25	Φ 50	3130	670	670
WDD-30.0/160	30000	160	4	Φ 500	640	8500	6x2.8	Φ 25	Φ 50	3530	670	670
WDD-37.4/200	37400	200	4	Φ 500	640	8500	7x2.6	Φ 25	Φ 50	2710	960	860
WDD-46.2/250	46200	250	4	Φ 500	640	8500	9x2.6	Φ 25	Φ 50	2710	960	860
WDD-57.3/310	57300	310	3	Φ 630	850	10800	9x2.8	Φ 25	Φ 50	3190	960	860
WDD-66.6/380	66600	380	3	Φ 630	850	10800	12x2.4	Φ 25	Φ 50	3500	1050	990
WDD-81.4/450	81400	450	4	Φ 630	850	10800	12x2.6	Φ 28	Φ 50	4120	1050	990